


HANDBOOK OF INSTRUCTIONS

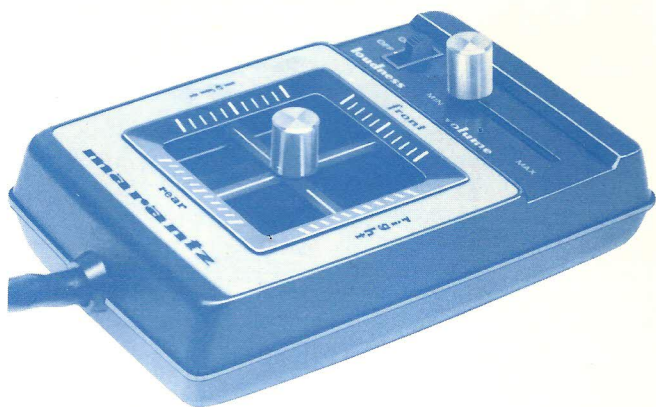

marantz®

We Sound Better

Model RC-4
Remote Control

GENERAL DESCRIPTION

The Model RC-4 Remote Control is specially designed for Marantz 4-channel audio components. The Model RC-4 incorporates a 4-channel balance control to adjust the relative outputs of all four channels, a volume control to adjust all four channels simultaneously, and a loudness switch to compensate for the human ear's response to bass and treble frequencies at low volume levels.

CONNECTION AND OPERATION

1. Be sure the power switch of the master unit is OFF.
2. Connect the plug of the RC-4 to the rear panel **REMOTE CONTROL** jack of the master unit.
3. Put the **remote control** switch of the master unit into the **REMOTE** position.
4. Put the RC-4 **volume** control in the **MAX** position.
5. Put the **volume** control of the master unit in the **MIN** position.
6. Center the RC-4 **balance** control.
7. Put the **power** switch of the master unit ON.
8. Increase the **volume** control of the master unit to the loudest level at which you will be listening.
9. The volume may now be adjusted with the RC-4 **volume** control.
10. Place the RC-4 control unit near your usual listening position.
11. Adjust the **balance** control for the most pleasant 4-channel balance.
12. When listening at low volume levels, put the RC-4 **loudness** switch ON. This will boost bass and treble tones to compensate for the human ear's insensitivity to these frequencies at low volume levels.

NOTE: Because the **volume** control of the master unit is operative in the **REMOTE** mode (see 4-8, above), the maximum volume achievable with the RC-4 **volume** control is limited by the master unit's

volume control. If you have the RC-4 **volume** control in **MAX** position and wish to further increase the volume, simply increase the setting of master unit's **volume** control.

CAUTION

1. Always turn the master unit's **volume** control to its minimum position before changing the position of the master unit's **remote control** switch. Failure to do so may result in damage to your loudspeakers.
- 2 Since the Model RC-4 is designed only for Marantz 4-channel units, no provisions are made for application to audio sets made by other companies. Any attempt to use the RC-4 with other sets may result in serious damage for which Marantz is not liable.



marantz®

MARANTZ CO., INC. • P. O. BOX 99 • SUN VALLEY, CALIFORNIA • 91352

A WHOLLY-OWNED SUBSIDIARY OF SUPERSCOPE INC., SUN VALLEY, CALIFORNIA 91352